

5 x 6.5 m



6.5 x 6.5 m



10 x 6.5 m



10 x 8.5 m



10.5 x 10 m



12.5 x 8.5 m



12.5 x 10 m



15 x 10 m




17 x 10 m



21.5 x 10 m



20 x 15 m



GENERAL:



Fabric material
Fabric characteristics

Aluminium poles


Wooden poles

- Triflexx double coated 560 g/m²
- Fire retardant M1 and B2
- Water column 8000 mm
- Pressure resistant up to 1000 N / 5 cm
- Watertight PVC coating on the inside and outside
- UV index: 8
- Wind resistance up to 8 beaufort (85 km/h)
- Standard: Ø 40 mm - heavy: Ø 60 mm
- Wall thickness 2.5 mm
- Connectable - poles of 110 cm, 50 cm coupling piece of 20 cm
- Eucalyptus poles from South Africa
- FSC-certified
- Plates to prevent splitting
- Side poles: 240 cm (Ø 5 - 7.5 cm), 280 cm (Ø 5 - 7.5 cm) Middle poles: 360 cm (Ø 7.5 - 10 cm), 420 cm (Ø 7.5 - 10 cm)

AVAILABLE COLOURS

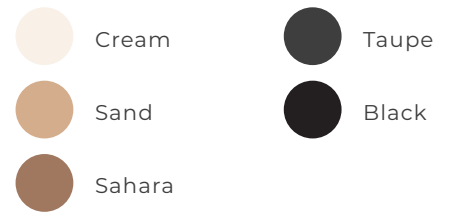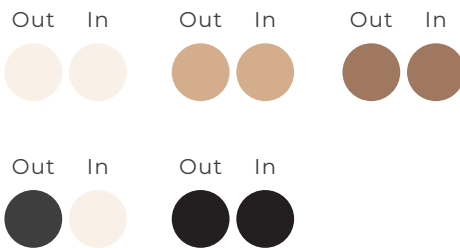

FABRIC COMPOSITION

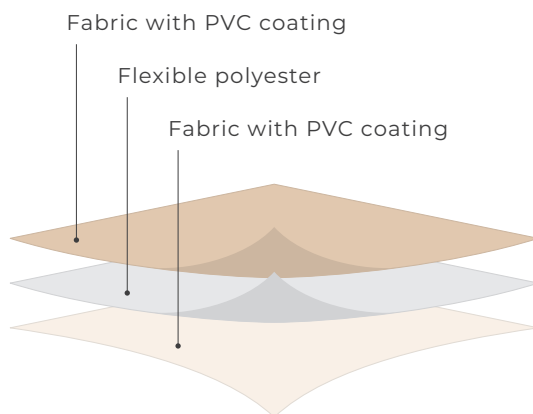

SETUP POSSIBILITIES*



One short side down



Two short sides down



One long side down

* These are only a few of the many possible setups. Other setups (e.g. only the corners down) are also possible.

bonga®



Number of people seated



Surface



Number of people standing



Weight (fabric + accessories, without poles)

5 x 6.5 m



20-26



39-42



32.5 m²



70 kg

6.5 x 6.5 m



25-34



50-55



42.25 m²



91 kg

10 x 6.5 m



39-52



78-85



65 m²



105 kg

10 x 8.5 m



51-68



102-110



85 m²



126 kg

10.5 x 10 m



63-84



126-137



105 m²



138 kg

12.5 x 8.5 m



64-85



128-138



106.25 m²



140 kg

12.5 x 10 m



75-100



150-163



125 m²



155 kg

15 x 10 m



90-120



180-195



150 m²



168 kg

17 x 10 m



102-136



204-221



170 m²



177 kg

21.5 x 10 m



129-172



258-280




215 m²



204 kg

20 x 15 m



180-240



360-369



300 m²



260 kg